

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
7 September 2001 (07.09.2001)

PCT

(10) International Publication Number
WO 01/65807 A2

(51) International Patent Classification⁷: H04L 127/58

(21) International Application Number: PCT/US00/34452

(22) International Filing Date:
18 December 2000 (18.12.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/514,657 29 February 2000 (29.02.2000) US

(71) Applicant: ERICSSON INC. [US/US]; 7001 Development Drive, Research Triangle Park, NC 27709 (US).

(72) Inventor: WAESTERLID, Anders; Planetvagen 1 B, S-141 40 Stuvsta (SE).

(74) Agents: BENNETT, David, E. et al.; Coats & Bennett, PLLC, P.O. Box 5, Raleigh, NC 27602 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD FOR FACILITATING ELECTRONIC COMMUNICATIONS

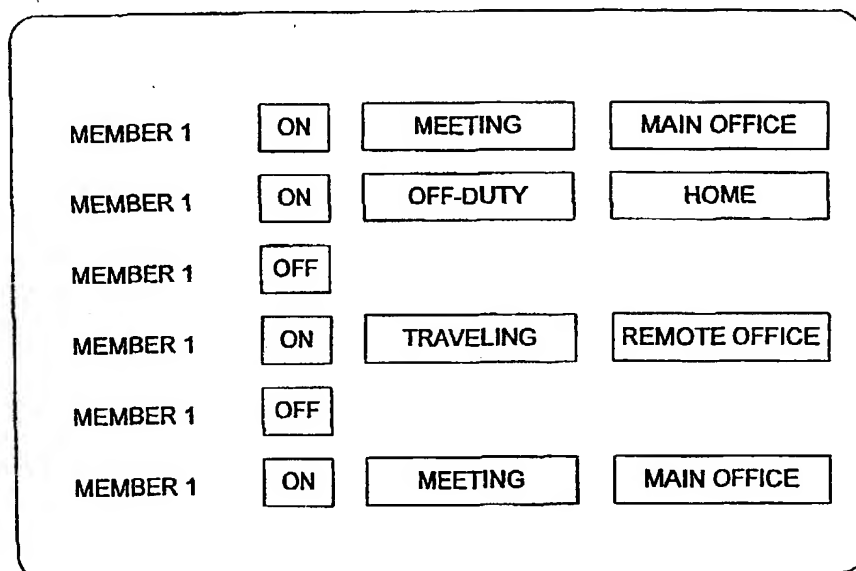

(57) Abstract: A communication method allows members of an affinity group to obtain up-to-date information concerning the status of other members of the affinity group. Each member of the affinity group is provided with a communication device for communicating with other members. The communication device includes a memory for storing member status information. When the status of one member in the affinity group changes, a status update message is sent from the member whose status has changed to other members of the affinity group. When a status update message is received from other members, the status information data contained in the message is used to update the member status information stored in memory.



WO 01/65807 A2

METHOD FOR FACILITATING ELECTRONIC COMMUNICATIONS

Field of the Invention

1 The present invention is relates generally to mobile communications
2 devices and more particularly, to a method for establishing affinity groups that
3 enable members of the group to send status information to and receive status
4 information from other members of the affinity group.

Background of the Invention

5 One reason for the popularity of portable, wireless communication devices,
6 such as cellular phones, is that it frees people from tethers to fixed communication
7 networks. A user can roam freely in the network, yet remain in touch with others.
8 Thus, mobile communication devices provide a means by which people can
9 remain in contact with whomever they want, wherever they happen to be. This is
10 especially true among groups of individuals who share a common interest or
11 affiliation (e.g. families, co-workers, those who share a common avocation or
12 interest, such as tennis or music, and members of a club). Such groups shall be
13 referred to herein as an affinity group.

14 Several existing technologies facilitate interaction among the members of
15 an affinity group: Internet "chat rooms," electronic mail (e-mail), advanced
16 personal information management (PIM) applications such as Microsoft® Outlook,
17 paging services, and advanced messaging services employing contact servers.
18 Some Internet chat software, for example AOL® Instant Messenger™, ICQ or
19 other similar programs, inform members of an affinity group which other members
of the group are currently logged into the server. Microsoft Outlook provides a
means for automatically scheduling meetings and notifying participants based on
available time shown on each individual's calendar. Some advanced messaging
services employing contact servers provide information on how to best contact a
particular individual based on the person's stored schedule or preferences. In

some cases, the assistance may even extend to automatically setting up a call using the best possible known method at that time.

All these technologies support, to some degree, the desire of members of an affinity group to stay in close contact. The Internet chat room approach of informing the user which affinity group members are on-line is particularly useful. However, this approach has limitations, the most serious of which is that the user must be logged onto the Internet and in contact with a particular server to receive information on the status of the other group members. For example, suppose a first group member would like to chat with a second member. The first member has no way of knowing whether the first member is logged onto the chat server without first logging onto the server himself.

Therefore, there is a need for a communication method that allows members of an affinity group to receive up to date status information about other group members without having to log into a server.

Summary of the Invention

The present invention is a connectionless status reporting method that allows members of an affinity group to send status information to and receive status information from other members of the affinity group. The invention provides members of the affinity group with up-to-date information concerning the status of other members in the affinity group without having to establish a connection to a server to obtain such information. This makes it easier to contact members of the affinity group and to avoid common communication pitfalls, such as voice mail, phone tag, etc.

The present invention is particularly well-suited for mobile communication networks, though it can be applied to advantage in fixed networks as well. Each member of the affinity group is provided with a communication device, such as a cellular phone or personal digital assistant (PDA). The communication device includes a memory for storing member status information. An application running on the member's communication device monitors the member's status and sends a status update message to other members when a status change is detected.

~~Status update messages may be sent directly from one member to another, or, alternatively, be sent to a centralized messaging server which then forwards the message to all other members.~~ When a member receives a status update message from another member, the application running on the member's device updates the member status information stored in memory to reflect the current status of the member. The member can view member status information on a display to determine the status of a particular member.

In a preferred embodiment of the invention, the application can be programmed to allow each member to select the particular status items that the member wants to report to other members of the group. Also, status reporting can be limited to particular periods of time, such as during working hours.

An advantage of the present invention is that each member receives status updates concerning other members as long as the member's communication device is turned on. ~~Status reporting is performed automatically and there is no need for the member to establish a connection to a server to obtain status information concerning other members. The user simply retrieves the latest status information from the memory of his communication device.~~

Brief Description of the Drawings

Fig. 1 shows a block diagram of a mobile communication network used to implement the communication method of the present invention;

Fig. 2 is a block diagram of a mobile communication device used to implement the communication method;

Fig. 3 is a diagram showing the general format for message used to implement the communication method;

Fig. 4 is a block diagram of an affinity group using a client/server approach;

Fig. 5 is a block diagram of an affinity group using a peer-to-peer approach;

Figs. 6A and 6B are a flow diagram of a set-up procedure used to create a new affinity group or to add a new member to an existing group;

Fig. 7 is a flow diagram of a resignation procedure for removing members from an existing group;

Fig. 8 is a flow diagram of a status update procedure for updating the status of a group member; and

Fig. 9 is a drawing of a user interface showing how member status information is displayed for viewing.

Detailed Description of the Preferred Embodiment

1 The present invention is a communication method that allows members of
2 an affinity group to send and receive status information to one another. The
3 communication method is implemented in a communication network, such as a
4 mobile communication network shown in Figure 1. The present invention is not,
5 however, limited in its application to mobile communication networks, but may
6 also be used in fixed networks. As seen in Figure 1, the cellular communication
7 system comprises a plurality of cells 12 that provide radio coverage throughout ①
8 the network. Each cell 12 is served by a base station 14 that provides radio
9 coverage to mobile communication devices 100 within that particular cell. The
10 base stations 14 are connected to a Mobile Services Switching Center (MSC) 16.
11 Typically, a cellular network will include many MSCs 16. At least one MSC 16 in
12 the network is connected via a gateway to the Public Switched Telephone
13 Network (PSTN) 18. Some MSCs 16 also serve as gateways connecting the
14 network 10 with other cellular networks. The function of the MSCs 16 is to route
15 calls and signals in the network to the appropriate destination. For example, the
16 MSC is responsible for connecting calls to the appropriate base station or to the
17 PSTN or other connected network via a gateway. The mobile radio
18 communication devices 100 may be cellular telephones, PCS phones, personal
19 digital assistants (PDAs), pagers, or other similar devices that communicate over
20 RF channels. The base stations 12 are connected to mobile service switching
21 centers MSCs 16.

In order to perform its call routing function, the MSC 16 must know the location of the mobile phones in the PLMN network so that calls can be forwarded to the appropriate base station. Information concerning the whereabouts of each mobile phone is stored in databases that are centrally located in the network. Each service provider will typically maintain its own database containing subscriber information which is shared with other networks in the PLMN. These databases include the Home Location Register (HLR) 20 and the Visitor Location Register (VLR) 22.

The HLR 20 is used to store information concerning subscribers to a cellular network. This information typically includes the user's name and address for billing purposes; the serial number of the user's mobile phone, and the services to which the user is entitled to receive. In addition, the current location of the subscriber is stored in the HLR 20 for retrieval by an MSC 16 to use in routing calls to the subscriber. The mobile unit registers with the servicing MSC 16 when it is powered on and at periodic intervals so that the servicing MSC 16 can keep track of the location of the mobile unit. The mobile unit also registers when it travels between two different service areas (areas served by different MSCs). As part of this registration procedure, the mobile unit transmits its Mobile Identification Number (MIN) to the MSC 16. The MSC 16 uses the MIN to determine which HLR 20 to access. When the mobile unit registers with MSC 16, the servicing MSC 16 updates the HLR 20 with the current location of the mobile phone. When an MSC 16 receives a call addressed to a subscriber that is not currently in that MSC's 16 service area, the MSC 16 will query the HLR 20 for the subscriber's location so that the call can be forwarded to the MSC 16 currently servicing the subscriber.

The VLR 22 is used to store information about users that are not in their home service area. When subscribers roam outside of their home service area, the VLR 22 in the area being visited must keep track of the subscriber's location and be able to verify the Mobile Identification Number (MIN) of the mobile telephone. The VLR 22 in the area being visited queries the HLR 20 in the subscriber's home service area to authenticate the subscriber and determine the services to which the subscriber is entitled. Information concerning the user is stored in the VLR 22 as long as the subscriber remains in the service area. The VLR 22 also stores the current location of the subscriber. The subscriber's current location is also communicated back to the home HLR 20 so that the home network will know how to forward calls addressed to the subscriber who is currently outside of the home network.

Many cellular networks 10 implement a service called the short message service. This service allows mobile users to send and receive short text messages. Messages originating from, or terminating at, a mobile phone 100 in the network

are stored in a message center 24 connected to an MSC. The message center 24 is a store-and-forward device or system that is used to support teleservices like cellular messaging. The typical interfaces to the message center 24 allow direct dial-in access, computer interface for e-mail delivery to phones, or human operator input for paging services. Mobile-originated SMS messages are initially forwarded to the MSC 16 servicing the addressed mobile phone 100 and routed by the MSC 16 to the message service center 24 where the SMS message is stored. The MSC 16 searches for the targeted mobile phone 100 and alerts the mobile phone 100 that a message is coming. The mobile phone 100 tunes to a designated messaging channel (typically an SDCCH channel) where it waits for the SMS message. The MSC 16 then forwards the SMS message to the mobile phone 100 on the designated channel and waits for an acknowledgement from the mobile phone 100 confirming receipt of the message. If an acknowledgement is received from the mobile phone 100, the message is removed from storage. If receipt of the message is not acknowledged, the MSC 16 may attempt to deliver the message again.

Referring now to FIG. 2, a communication device 100 that implements the present invention is shown. The particular embodiment disclosed is a personal digital assistant (PDA) though other types of communication devices, such as cellular phones and pagers could also be used. PDA 100 combines a cellular radio transceiver with a hand-held computer. The PDA 100 includes a microprocessor 110, program memory 112, user interface 114, including a display 116 and an input device 118, audio processing circuits 120, and a transceiver section 130 connected together by a system bus 150 having address, data, and control lines. The PDA may also include an infrared and serial interfaces, 140 and 142 respectively, for exchanging data with other devices.

(19) → The microprocessor 110 controls the operation of the device according to instructions stored in memory 112. The processor 110 can be any commercially available or custom microprocessor suitable for an embedded application. The memory 112 is representative of the overall hierarchy of memory devices containing the software and data used to implement the functionality of the communication device 100. The memory 112 can include, but is not limited to, the

following types of devices: cache, ROM, PROM, EPROM, EEPROM, flash, ✓
SRAM, and DRAM. As shown in Figure 2, the memory 112 may hold four major
categories of software and data used in the computing device: the operating
system 112a; the input/output (I/O) device drivers 112b; the application programs
112c; and the application program data 112d.

The operating system 112a is typically designed for embedded applications
and, preferably, is relatively compact to make the most efficient use of the
memory. One such example of an operating system meeting these criteria is the
EPOC operating system sold by Symbian Ltd., Sentinel House, 16 Harcourt St.,
London W1H 1DS UK, which was developed for portable hand-held computers
and can be used in a preferred embodiment of the present invention.

The I/O device drivers 112b include software routines that are accessed
through the operating system 112a by the application programs 112c to
communicate with devices such as the display 116, certain components of the
memory, and I/O ports such as a serial port 140 or infra-red (IR) port 142 for
transferring data to another device or system.

The application programs 112c comprise the programs that implement the
various application functions of the computing device 100. The application
programs may include software to implement features such as e-mail, Internet ✓
access, word processing, or contact management. The present invention relates
particularly to a messaging application residing in memory 112c. The messaging
application 112c may be a stand-alone application or may be a component of a
larger application, such as a contact manager. The static and dynamic data used
by the application programs 112c is represented by the application data 112d.

The user interface 114 includes a display 116 and a user input device 118.
Display 116 enables the user to view stored information, such as user status
information. The input device 118 may be any known input device for a
computing device including without limitation a keypad, pointing device (such as a
mouse, trackball, touch pad, or light pen), or touch screen. Voice activation could
also be used for user input. ↗

The transceiver section 130 is a fully functional cellular transceiver capable
of transmitting and receiving radio signals. The details of transceiver section 130

1 are conventional and well known to those skilled in the art. To briefly describe,
2 the transceiver 130 of the preferred embodiment includes a digital signal
3 processor 132 for processing signals transmitted and received by the device 10,
4 and an RF circuits 134, connected to an antenna 136. Since transceivers 130 are
5 well-known in the art and are not per se material to the present invention, further
6 description of the transceiver 130 is omitted for the sake of brevity.

7 The audio processing circuits 120 are shared by the transceiver 130 and
8 application programs 112c executed by the processor 110. A microphone 122
9 converts audible sounds, such as voice, into electrical signals that are input to the
10 audio processing circuits 120. The processed audio signals can be transmitted by
11 said transceiver 130 or used by an application program in memory 112c. A
12 speaker converts audio signals output by said audio processing circuits into
13 audible sounds that can be heard by the user. The audio signals may be received
14 by said transceiver 130, generated by an application program in memory 112c, or
15 retrieved from memory 112d.

16 The messaging application stored in memory 112c enables members of an
17 affinity group to obtain up-to-date status information about other members of the
18 affinity group without the need to first connect to or poll a server. The status
19 information for each group member may include, but is not limited to, the following
20 status items:

- 21 1) current state of the members communication device 100,
- 22 2) current activity (e.g. work, meeting, lunch, traveling, of-duty, etc.), and
- 23 3) current location.

24 These are but a few examples of the types of status information that can be
25 shared with members of the affinity group.

26 Figure 9 illustrates an example display screen, which might be used by a
27 client application running on a member's mobile communication device 100. The
28 display 60 lists members of the affinity group along with the pertinent status
29 information of each listed member. There are many other ways in which the
30 status information could be displayed. The particular manner chosen to display
31 status information is not material to the invention, but is shown to facilitate the
32 understanding of the invention.

1 ✓ In order to implement the status reporting method of the present invention,
 2 it is necessary for the messaging applications running on different users'
 3 communication devices 100 to exchange messages 150. Figure 3 shows the
 4 general format for all messages 150 used by the messaging applications. The
 5 content of particular messages 150 will be described in detail below. Each
 6 message 150 includes a header 152 comprising a Message Identifier field 154,
 7 Message Type field 156, and Group Identifier field 158. The header 152 is
 8 followed by an Information field 160 that varies from one type of message to
 9 another. The Message Identifier field 154 contains a flag that indicates to the
 10 receiving device 100 that the message is for the messaging application so that the
 11 receiving device can decode and route the message to the messaging application.
 12 The Message Type field 156 indicates the type of message contained in the
 13 packet (e.g. Membership Request message, Membership Reply message, Status
 14 message, Group Update message, etc.). The various types of messages are
 15 described below. The Group Identifier field 158 contains a unique identifier for the
 16 affinity group so that the application can discriminate between messages for
 17 different groups. This feature allows the user to join a plurality of different affinity
 18 groups.

19 Two distinct approaches may be taken to communication between group
 20 members. The preferred approach is the client server approach illustrated in
 21 Figure 4. In this approach, a messaging server 170 is installed at a central
 22 location in the network 10, such as the messaging center 24. Client applications
 23 172 are installed in individual member's communication devices 100. The
 24 messaging server 170 is responsible for maintaining a master group database.
 ✓ Individual clients also maintain member status information in a member database
 25 or file. The short message service is used to transmit messages between the
 26 messaging server 170 and the clients 172 running on the individual member's
 27 communication devices 100. One advantage to using the short message service
 28 is that it allows the present invention to be easily implemented in any system
 29 where the short message service is already being used. A messaging server 170
 30 can be easily installed at the messaging center 24 without significant
 31 modifications.

(3) other

An alternative approach, called the direct messaging or peer-to-peer approach, is shown in Figure 5. In this approach, each communication device 100 is a peer 180 and communicates directly with other peers 180 in the group. There is no centralized server or database. Instead, each peer 180 in the group is responsible for maintaining its own database for each group in which that peer 180 is a member. Messages are sent as datagrams via the communication network 10 directly from one peer 180 to another. For example, when the status of a member changes, the peer 180 sends a Status Update message to every other peer 180 in the affinity group. This direct messaging or peer-to-peer approach has the drawback of requiring numerous uplink messages to be sent by the peer 180, particularly where the affinity group is large. On the other hand, the peer to peer approach does not depend on the network or a centralized server in order to function. The peer to peer approach can therefore be implemented in any network that supports datagram signaling between clients.

15 *Messaging Procedures*

The messaging procedures are largely independent of the particular communication method chosen. According to the present invention, a user creates an affinity group and then sends a Membership Request message inviting one or more other users to join the affinity group. The user creating the affinity group becomes the owner of the group and is referred to as the group administrator. Recipients of the Membership Request message can reply to the invitation by sending a Membership Reply message either accepting or declining the invitation to join the affinity group. Those accepting the invitation are added to the group along with the group administrator. After joining the affinity group, each existing member receives a Group Update message from the group administrator or messaging server containing the names of the other members to the affinity group. New members may also receive a Group Update message, but in this case, the message will contain information concerning the existing members and their current status.

A member of the affinity group can withdraw from the group by sending a Resignation message to the group administrator or messaging server. Receipt of a Resignation message by the group administrator or messaging server spawns a Group Update message deleting the resigning member from the group.

Once affinity group is established, Status Update messages are transmitted by members whenever their status changes. The client application monitors the user's status and reports any status changes to the messaging server or other group members. The Status Update messages allow all members of the affinity group to be kept abreast of the status of other members in the affinity group. As will be explained in more detail below, the member can customize the application to specify the type of status information that the member wants to disclose to other members.

Figures 6–8 illustrate the various procedures for establishing a group and reporting status information in a system using a centralized messaging server as shown in Figure 4. These procedures can be readily adapted for use in a peer to peer system.

Figure 6 is a flow diagram illustrating an exemplary setup procedure 200 for establishing a new affinity group or adding a new member to an existing group. A first user sends a Membership Request message via the messaging server 170 to one or more prospective members whom the first member would like to join the affinity group (block 202). The Membership Request message specifies a particular affinity group to which the request applies. The messaging server 170 determines whether the group specified in the Membership Request message already exists (block 204). If the group already exists, then the messaging server 170 simply relays the message to the addressed parties (block 208). If not, it creates a new affinity group and designates the first user as the group administrator (block 206). The Membership Request message is then forwarded by the messaging server 170 to the addressed parties (block 208). Only the group administrator can send a Membership Request message. The invitation to join an affinity group may be time limited. The time period to join may remain open for a predetermined time period that is set by default or for a time period that is specified by the group administrator in the Membership Request message.

The format of a Membership Request message is shown in Appendix A. Since the number of members is constantly changing, the length of the message is variable. As shown in Appendix A, the Membership Request message contains data corresponding to each member of the affinity group. The member data may include, for example, the name, address, telephone number, and current status of each member.

When the Membership Request message is received, the client application on the member's device displays the member information so that the receiver of the message can decide whether to join the affinity group. Prospective members who receive the Membership Request message can either accept or decline the invitation to join an affinity group by sending a Membership Reply message. When a Membership Reply message is received at the server 170 (block 210), the server 170 decodes the message and determines whether the prospective member has accepted or rejected the invitation to join the affinity group (block 212). The format of a Membership Reply message is shown in Appendix A. The Membership Reply message is a fixed length message. The Information field of a Membership Reply message includes only a response flag that indicates whether the prospective member has accepted or rejected the invitation to join the affinity group.

When a prospective member accepts a Request for Membership message, the client application on the new member's communication device 100 creates an affinity group database and stores it in memory. A record is created in the database or file for each member of the affinity group. Each user record is populated with the corresponding member data contained in the Membership Request message.

If the prospective member declines the invitation, the server 170 relays the Membership Reply message to the group administrator and no further action is taken (block 214). If the prospective member accepts the invitation, the server adds the prospective member to a member database stored in memory (block 216) and forwards the acceptance to the group administrator (block 218). A Group Update message is then sent to all current members (block 220). The Group Update message may be generated automatically by the server 170 or the

1 client application running in the group administrator's communication device 100. ✓
 2 In the latter case, the Group Update message is sent to the messaging server 170
 3 and then forwarded to each member of the affinity group. The Group Update
 4 message contains a list of all members of the group, including the newly added ↗
 5 member. The Group Update message may also include other information about
 6 the new member, such as home or business address, occupation, telephone
 7 number, or other pertinent information if desired.

8 The format of a Group Update message is the same as the Membership
 9 Request message, however, the Message Type field is different to distinguish it
 10 from the Membership Request message. The Group Update contains a complete
 11 list of Group Members and is sent to all members of the group. When the Group
 12 Update message is received by a member, the client application on the member's
 13 communication device 100 takes appropriate action to add, delete, or modify
 14 member records in the corresponding group database.

Figure 7 illustrates the resignation procedure 300 for withdrawing from an affinity group. A resigning member sends a Resignation message to the messaging server. When the Resignation message is received (block 302), the server forwards the Resignation message to the group administrator (block 304) and then removes the resigning member from the group database (block 306). The group administrator or messaging server then generates a new Group Update message deleting the resigning member (block 308). After receiving the Group Update message, the client software on the member's communication device 100 deletes the resigning member from its records.

Figure 8 is a flow diagram illustrating the procedure 400 for updating status information. The flow chart is a composite of the actions taken by both the client and server applications. In the preferred embodiment, the client application 172 operates in the background to monitor the member's status (block 402). Periodically, the client application checks to see if the member's status has changed (block 404). If no change in status has occurred, no action is taken and the client application continues monitoring (block 402). When a status change is detected, the client application automatically sends a Status Update message to the messaging server (block 406). The user could cause a status update

1 message to be sent by entering a new status. The format of the Status Update
2 message is shown in Appendix A. The Status Update message includes, in the
3 information field, a member status record field that contains data reflecting the
4 current status of that member. ~~The member status record field includes, a~~
5 ~~Member Identifier field, an On/Off Status field, an Activity Status field, and a~~
6 ~~Location field.~~ The messaging server relays the Status Update message to all
7 members using the broadcast short message service (block 408). The server
8 may combine Status Update messages received from different clients into a single
9 message to reduce the number of messages that must be transmitted. An
10 example of a combined Status Update message is shown in Appendix A. The
11 Status Update message contains a plurality of member status record fields.
12 Generally, there is one member status record field for each member whose status
13 has changed.

14 When a Status Update message is received by a client application, the
15 client application takes appropriate action to update the group database to reflect
16 the changes in member status (block 408). If desired, the client application can
17 generate a signal to notify the user that a ~~Status Update message has been~~
18 ~~received.~~ The signal can be audible, visual, or tactile.

19 In the preferred embodiment of the invention, each member has the ability
to specify what ~~status information is made available to other members of the~~
affinity group. Members may choose to communicate any subset of the three
parameters discussed (on/off state, activity or location) or others that end users
may create to the other members of the group. These preferences are preferably
stored in the ~~non-volatile memory in each member's communication device 100,~~
or alternatively, at the messaging server 170. For applications in which parents
may want to use the invention as a means to keep track of children (e.g. in an
amusement park), a simple password security provision can be added so that the
children cannot turn off the reporting of status information without the permission
of a parent.

Further, in a preferred embodiment, the user can limit status reporting to
predetermined time periods. For example, the user could program the client
application 172 to send status updates only during a specified period. The period

can be specified in any manner, such as by time. For example, the user could limit status reporting to daytime hours. Also, the user could specify a particular mode (e.g., work) corresponding to an activity status during which the user's status is reported. Equivalently, the user could suppress status reporting during a specified time period or mode.

~~The number of messages that must be sent by a client can be reduced by using available network information about phone on/off status or location. For example, the on/off status or location of the member can be reported to the messaging server by the HLR 22 eliminating the need for the client to report such information.~~ The server 170 could then generate a Status Update message and send the Status Update Message to the members. In this embodiment, no uplink transmissions reporting changes in on/off status or location are needed. However, this would require that additional functionality be built into the network and may not be practical to implement in existing networks.

It should be appreciated that the present invention can be applied to fixed networks such as the Internet or local area network. For the same reasons that it is desirable to know the status of other portable communication device carriers, it may desirable to know that a co-worker on a local area network is "in a meeting" ~~or other status which may affect the desire of the user to contact the other member of the affinity group.~~ Furthermore, it should be appreciated that the amount of information available in a single indoor wireless communication system, such as the Ericsson Freeset, is much greater. Specifically more information is immediately available at the location of each member of the group since the indoor base stations are generally fixed and known a priori.

The present invention may, of course, be carried out in other specific ways than those herein set forth without departing from the spirit and essential characteristics of the invention. The present embodiments are, therefore, to be considered in all respects as illustrative and not restrictive, and all changed coming within the meaning and equivalency range of the appended claims are intended to be embraced therein.

APPENDIX A

Message Format

Membership Request Message

Header
Message Identifier
Message Type
Group Identifier
Information Field
Member Data (member 1)
Member Data (member 2)
...
Member Data (member k)

Membership Reply Messages

Header
Message Identifier
Message Type
Group Identifier
Information Field
Response Flag

Group Update Message

1	Header
2	Message Identifier
3	Message Type
4	Group Identifier
5	Information Field
6	Member Data (member 1)
7	Member Data (member 2)
	...
	...
	Member Data (member n)

Status Update Message (format used by client)

Header
Message Identifier
Message Type
Group Identifier
Information Field
Member Identifier
On/Off Status
Activity Status
Location

Status Update Message (format for combined message)

Header
Message Identifier
Message Type
Group Identifier
Information Field
Member Status Record 1
Member Status Record 2
Member Status Record 3
...
...
Member Status Record n

What is claimed is:

1. A communication method implemented in a communication network for allowing members of an affinity group to send status information to and receive status information from other members of said affinity group, said communication method comprising:
 - a. forming an affinity group containing two or more members;
 - b. storing, in an individual's members communication device, status information concerning other members of said affinity;
 - c. when the status of a one member in said affinity group changes, sending a status update message from said member whose status has changed to the other members of said affinity group;
 - d. receiving said status update messages concerning other members of said affinity group; and
 - e. updating said status information in said individual member's communication device when a status update message concerning another member is received.
2. The communication method according to claim 1 wherein said status information comprises a plurality of status items.
3. The communication method according to claim 2 wherein the status information includes at least one or more of the following status items: on/off status of the member; activity status of the member; and location of the member.
4. The communication method according to claim 2 wherein each individual member selects the status items from a list of available status items that are reported to other members of the affinity group.
5. The communication method according to claim 2 further including the step of designating a period during which status updates are enabled.

6. The communication method according to claim 2 further including the step of designating a period during which status updates are suppressed.
7. The communication method according to claim 1 further including the step of automatically detecting status changes of a member and sending status update messages when a status change is detected.
8. The communication method according to claim 7 wherein the status of a member is monitored by said member's communication device and wherein said communication device is programmed to automatically transmit a status update message when a change in status is detected.
9. The communication method according to claim 7 wherein the status of a member is monitored by a centralized server in said communication network and wherein status update messages are transmitted to other members in said affinity group when a member's status changes.
10. A communication method implemented in a mobile communication network for allowing members of an affinity group to send status information to and receive status information from other members of said affinity group, said communication method comprising:
 - a. forming an affinity group containing two or more members;
 - b. storing member status information data in mobile communication devices used by said members;
 - c. sending a status update message from a first member's communication device to a centralized server when said first member's status changes;
 - d. forwarding said status update message from said server to a second member of said affinity group;
 - d. receiving said status update message at said second member's mobile communication device; and

e. updating said status information in said second member's mobile communication device when said status update message is received.

11. The communication method according to claim 10 wherein said status information comprises a plurality of status items.

12. The communication method according to claim 11 wherein the status information includes at least one or more of the following status items: on/off status of the member; activity status of the member; and location of the member.

13. The communication method according to claim 11 wherein each individual member selects the status items from a list of available status items that are reported to other members of the affinity group.

14. The communication method according to claim 11 further including the step of designating a period during which status updates are enabled.

15. The communication method according to claim 11 further including the step of designating a period during which status updates are suppressed.

16. The communication method according to claim 10 further including the step of automatically detecting status changes of a member and sending status update messages when a status change is detected.

17. The communication method according to claim 16 wherein the status of a member is monitored by said member's communication device and wherein said communication device is programmed to automatically transmit a status update message when a change in status is detected.

18. The communication method according to claim 16 wherein the status of a member is monitored by a centralized server in said communication network and

wherein status update messages are transmitted to other members in said affinity group when a member's status changes.

19. A mobile communication device for allowing a member of an affinity group to send status information to and receive status information from other members of said affinity group, said mobile communication device comprising:

- a. a memory for storing member status information data;
- b. a transmitter responsive for transmitting status update messages to other members of said affinity group when said member's status changes;
- c. a receiver for receiving status update messages from other members of said affinity group;
- d. a processor operatively connected to said memory for writing status information to and reading status information from said memory, said processor being programmed to:
 1. generate a status update message when said member's status changes for transmission by said transmitter to other members of said affinity group; and
 2. update said status information stored in said memory when a status update message is received from another member of said affinity group.

20. The mobile communication device according to claim 19 wherein the member status information stored in said memory includes a plurality of status items.

21. The mobile communication device according to claim 20 wherein the status items include one or more of the following status items: on/off status of the member; activity status of the member; and location of the member.

22. The mobile communication device according to claim 19 further including means for selecting the status items from a list of available status items that are reported to other members of the affinity group.

23. The mobile communication device according to claim 19 further means for designating a period during which status updates are enabled.
24. The mobile communication device according to claim 19 further including means for designating a period during which status updates are suppressed.
25. The mobile communication device according to claim 19 further including means for automatically detecting status changes of a member and sending status update messages when a status change is detected.

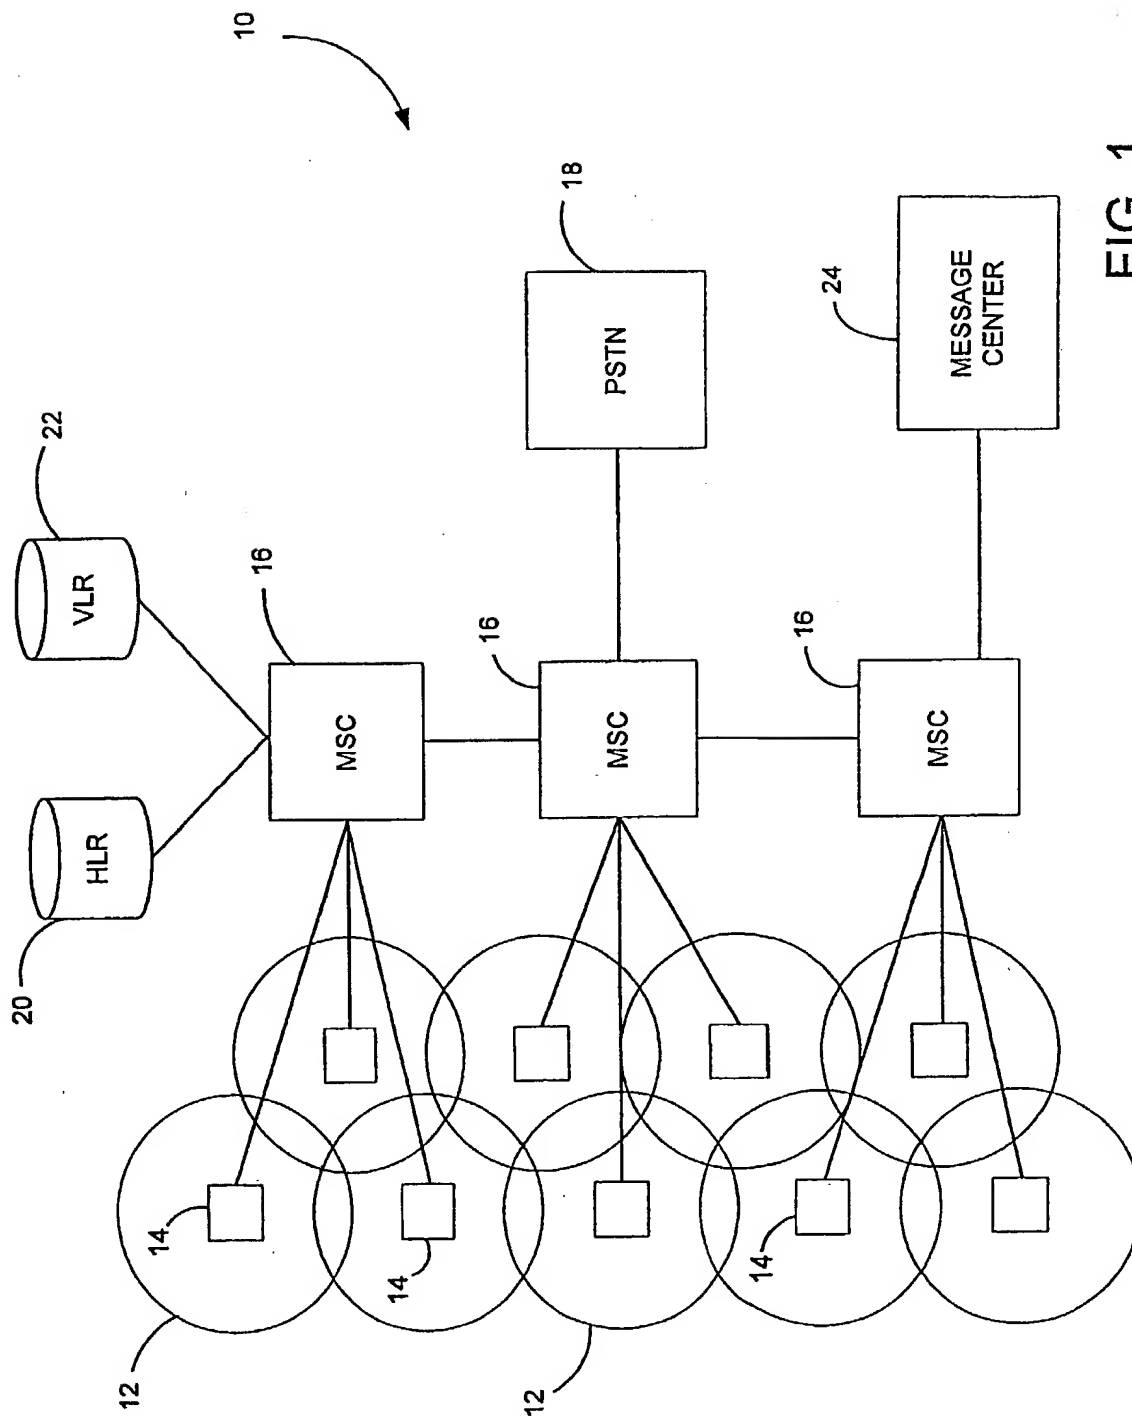


FIG. 1

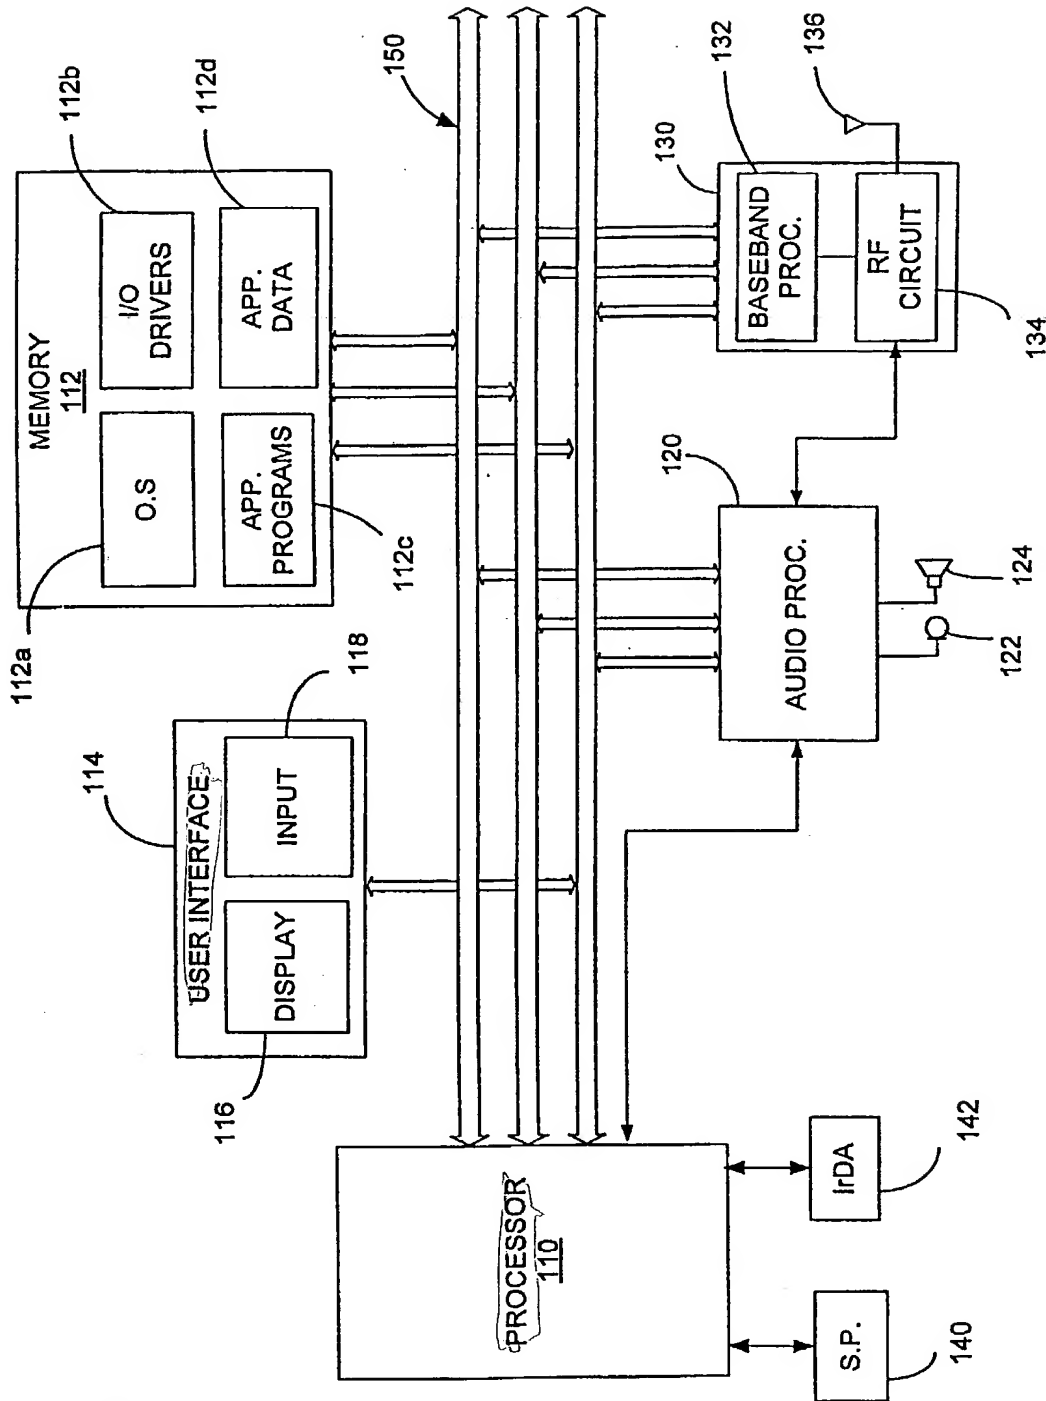


FIG. 2

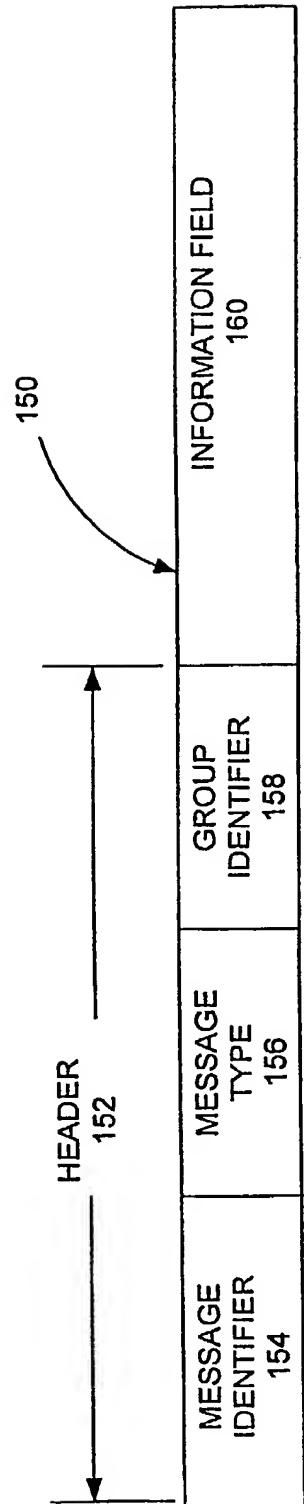


FIG. 3

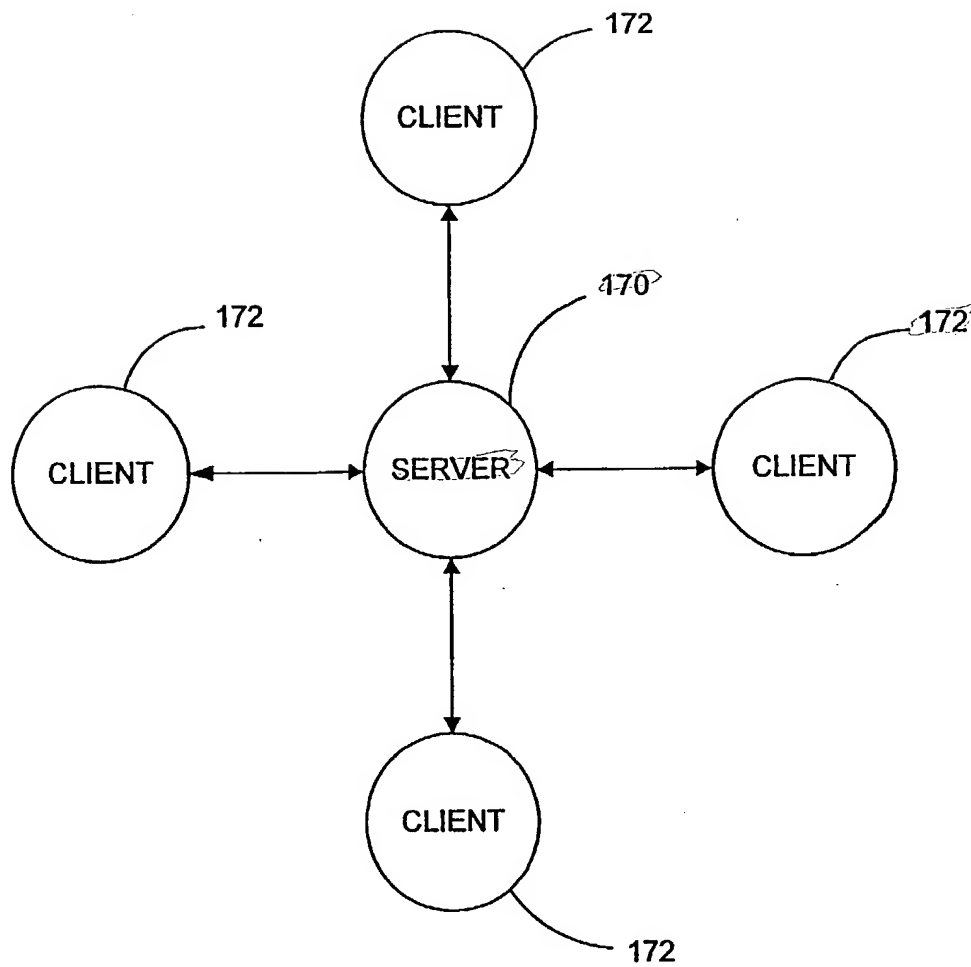


FIG. 4

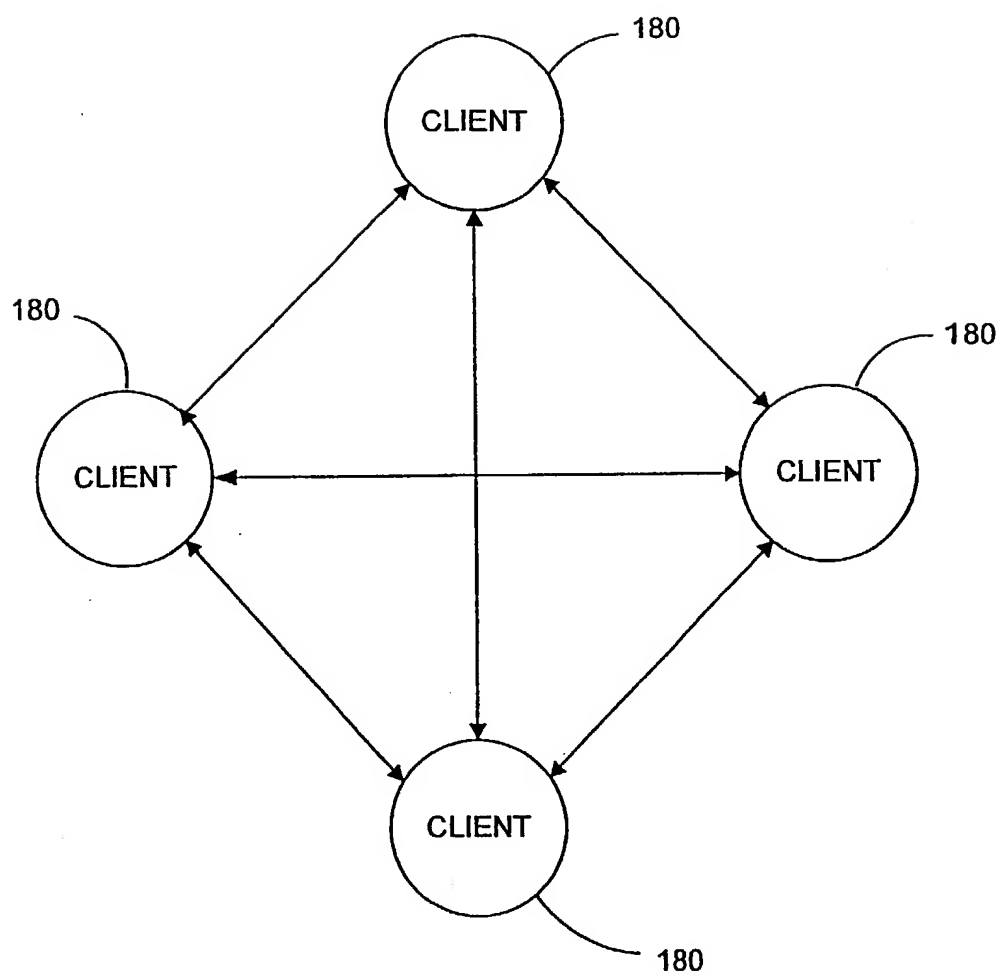
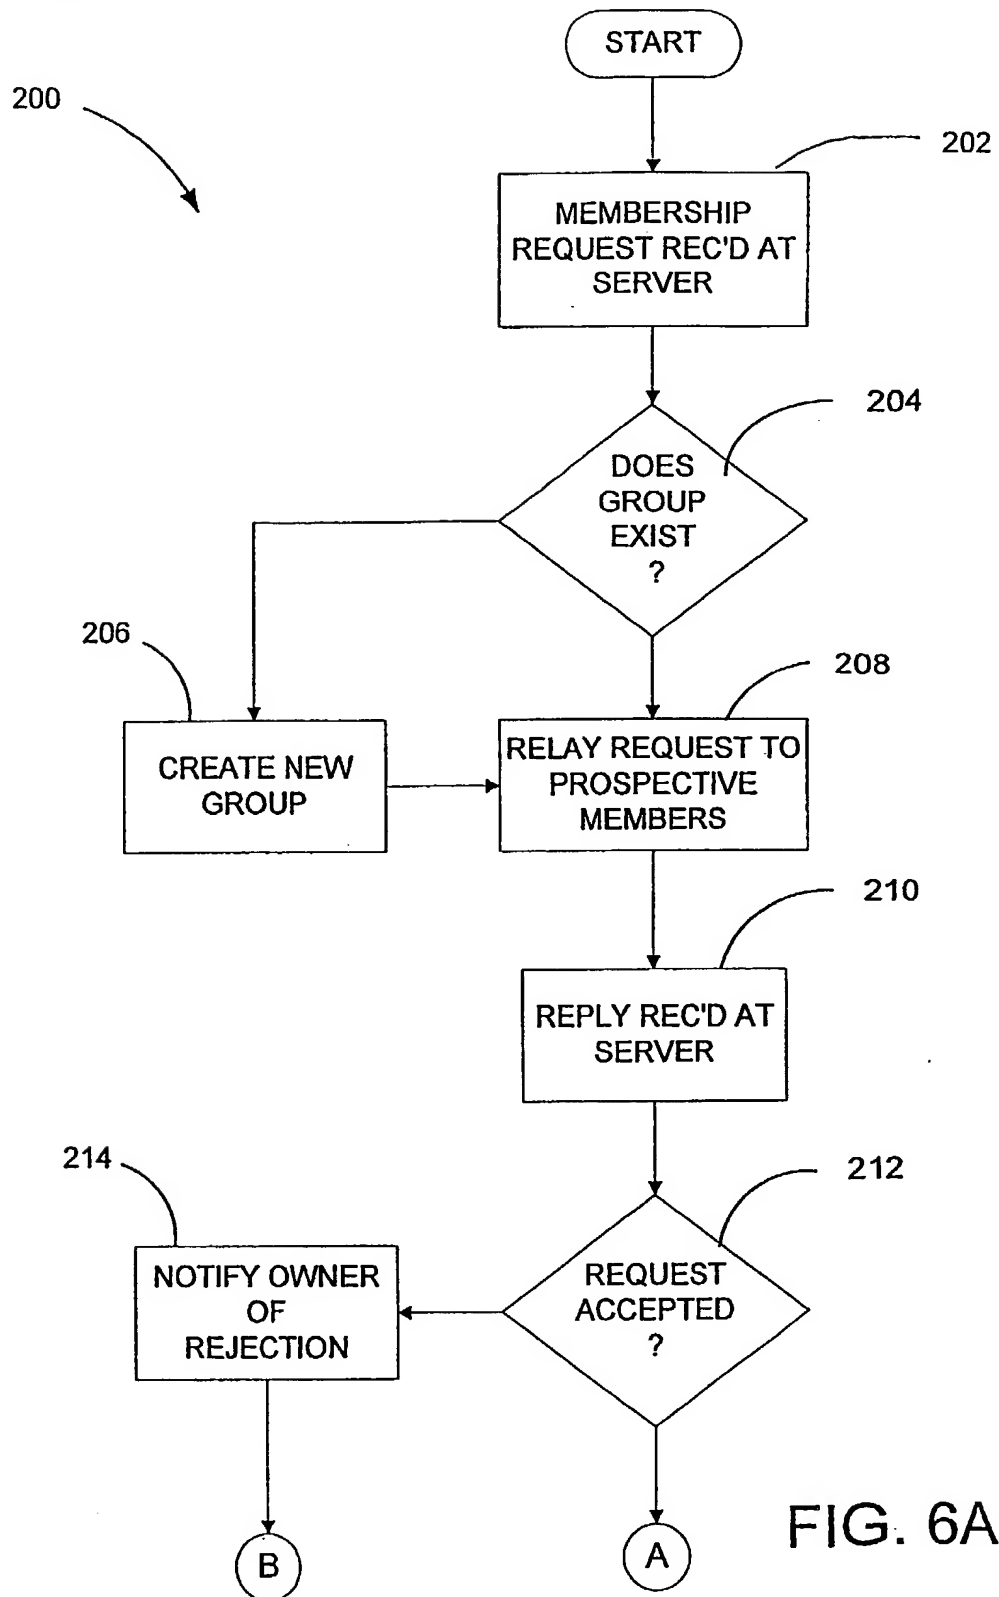


FIG. 5



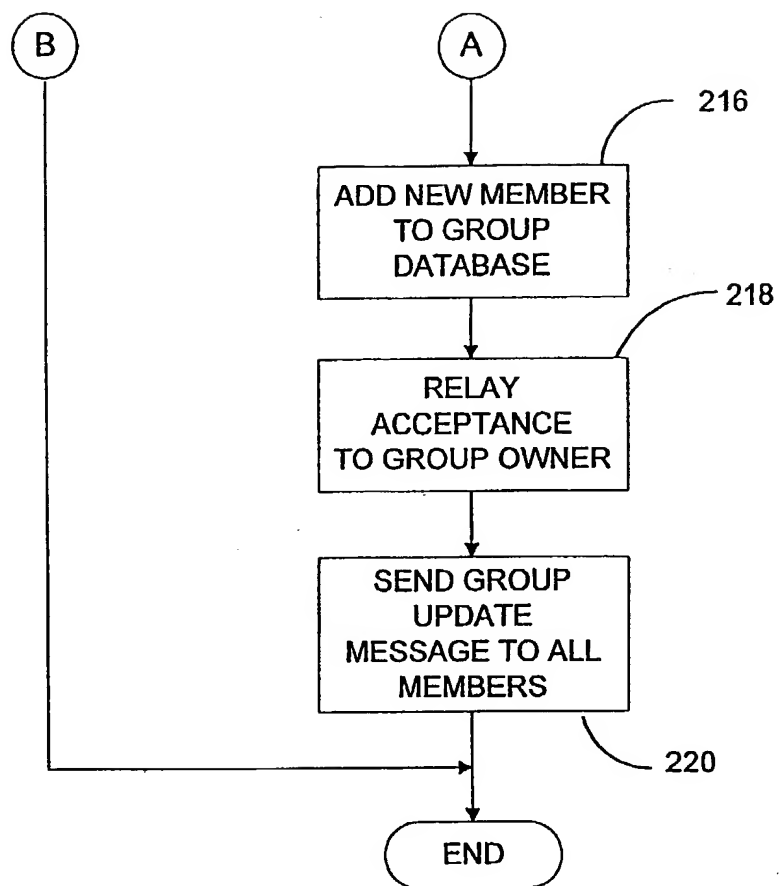


FIG. 6B

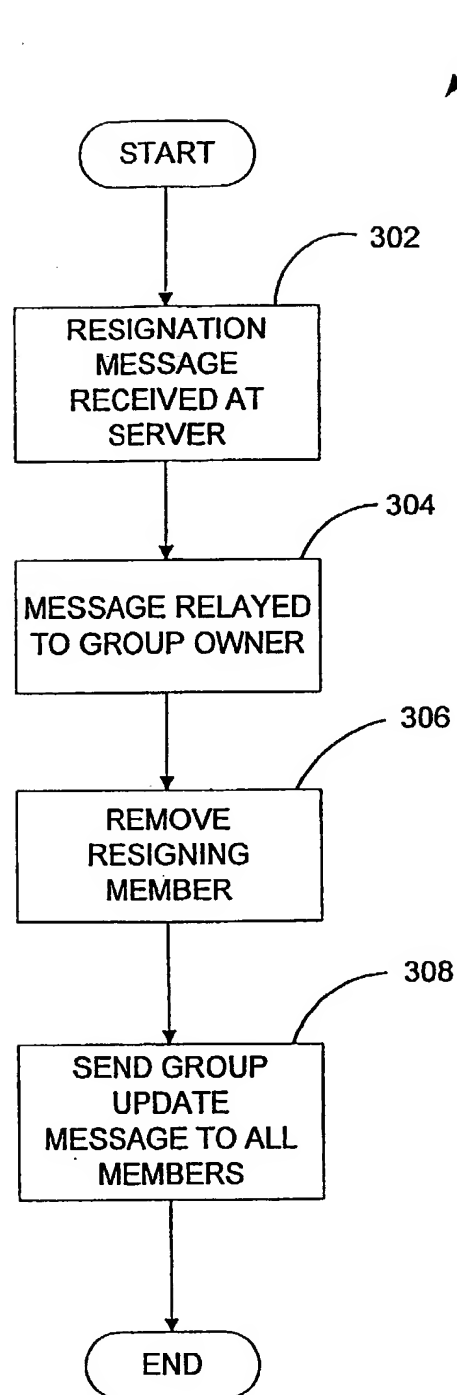


FIG. 7

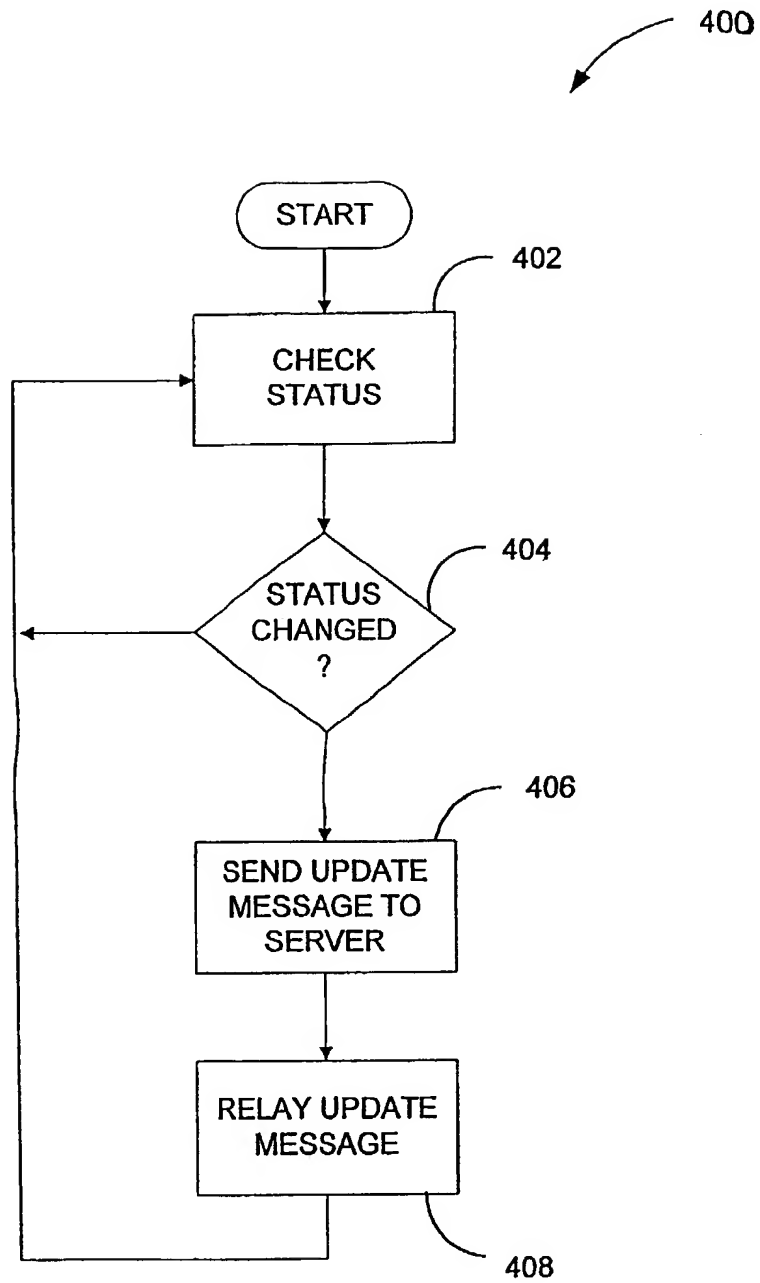


FIG. 8

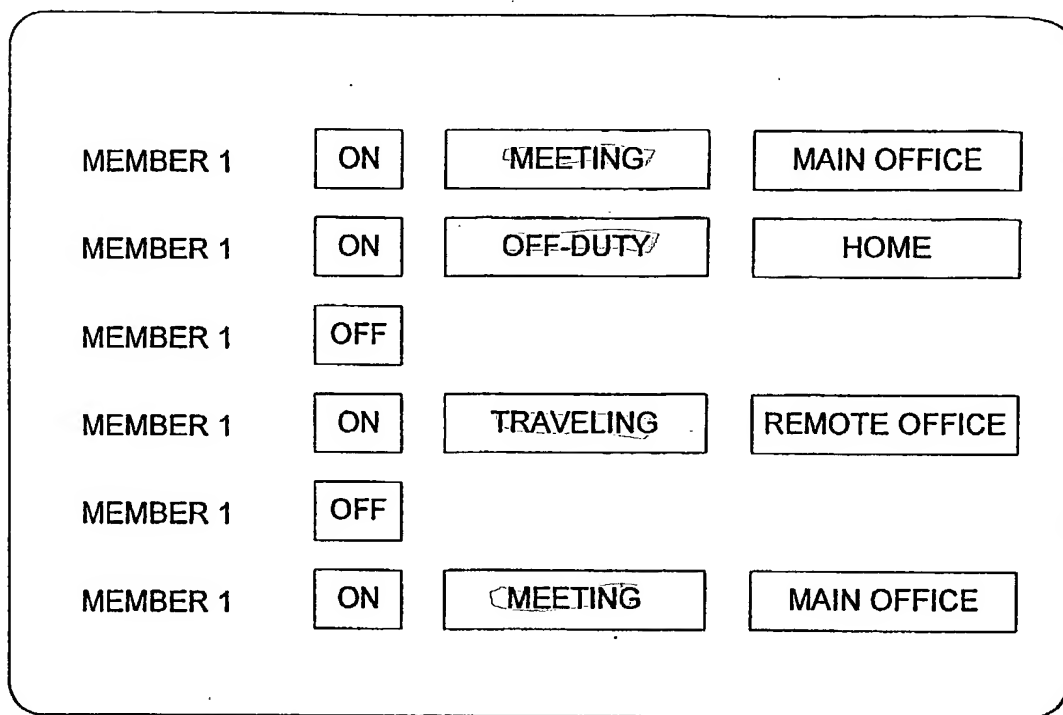


FIG. 9